

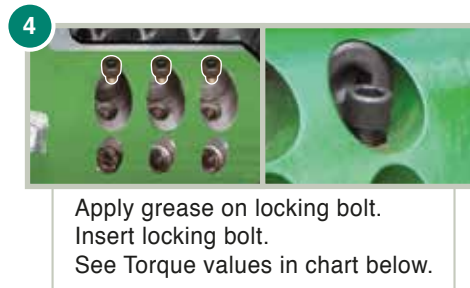
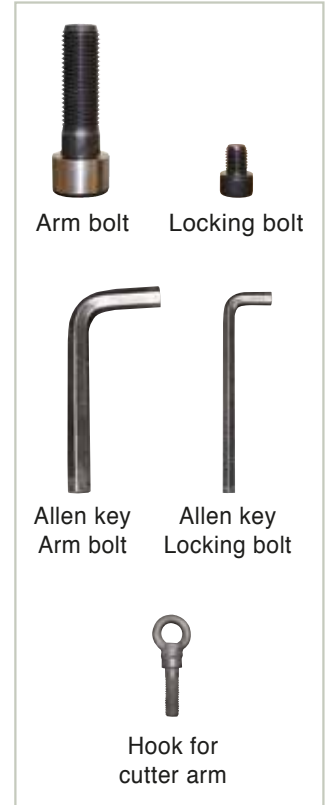


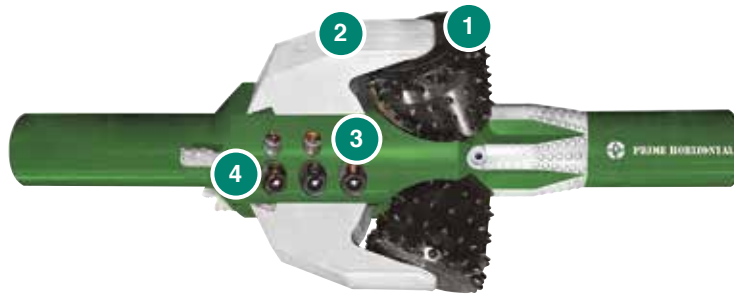

Rock Reamer

Installation guide & steps

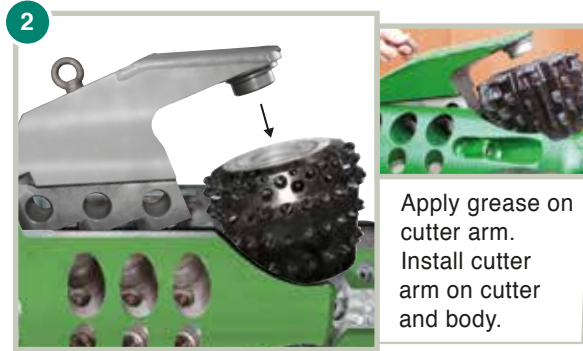

Torque values		
Tool size	Tightening torque	
	Arm bolt	Locking bolt
RR4	400–500 ft-lb	40–60 ft-lb
RR6	1,000–1,200 ft-lb	100–150 ft-lb
RR8 – RR48	2,000–2,500 ft-lb	400–500 ft-lb

Size chart of bolts				
		RR4	RR6	RR8-RR48
Arm bolt	Length	2.952"	4.606"	6.496"
	Width	1.102"	1.653"	2.204"
	Allen key size	5/8"	7/8"	1"
Locking bolt	Length	0.866"	1.220"	1.732"
	Width	0.551"	0.748"	1.102"
	Allen key size	5/16"	3/8"	5/8"

Prime Horizontal offices

www.primehorizontal.com

United States, Canada, Mexico, Brazil

Prime Horizontal Inc
 1302 Gulf Boulevard, New Iberia, LA 70560 US
 Ph (US): +1 337 359 9061
 Ph (CA): +1 780 800 6614
 Ph (BRZ): +55 71 3023 0934

Europe, China, Middle East

Prime Horizontal Ltd
 Salland 3
 1948 RE Beverwijk
 The Netherlands
 Phone: +31 251 271 790

Australia, Southeast Asia, India

Prime Horizontal Australia Pty Ltd
 10 Enterprise Street, Cleveland,
 QLD 4163, Australia
 Ph (AUS): +61 73 821 3684
 Ph (IND): Phone: +91 997 172 9753